

Luminaire

Code 0918W70A
Name Mesmeri LED 2700K - rame

Measur.

Code FTS1700096
Name Mesmeri LED 2700K - rame


Luminaire Flux	2450.00 lm	Luminaire Power	28.00 W	Efficacy	87.50 lm/W	Efficiency	100.00%
Lamps Flux	2450.00 lm	Maximum value	377.62 cd/klm	Position	C=0.00 G=140.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	340 mm	Width	234 mm	Height	154 mm
Rectangular Luminous Area		Length	145 mm	Width	50 mm	Height	29 mm
Horizontal Luminous Area	0.007250 m ²	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	
Emitting area on Plane 0°	0.004350 m ²	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	
Emitting area on Plane 90°	0.001500 m ²	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	
Emitting area on Plane 270°	0.001500 m ²	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	
Emitting area on Plane 90°	0.001500 m ²	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	
Coordinate system	CG	Symmetry Type		Sym. on planes 0-180		Sym. on planes 0-180	
Date	04-03-2014	Maximum Gamma Angle		180		180	
Measurement Distance	0.00	Measurement Flux		2450.00 lm		2450.00 lm	

LED Flux=2634,41lm LED Power=25W Eff=93% EfcLed=105lm/W EfcLum=88lm/W Ra=90 SDCM=2 L70(6K)=36000h

C.I.E. 31 55 70 8 100
F UTE 0.08 H + 0.92 T

D DIN 5040 --
B NBN BZ 7 / 2 / BZ 8 / 4 / BZ 9

340mm x 234mm




Semipiani C

180.0 ——— 0.0
270.0 - - - - - 90.0

ULOR 91.98 %

DLOR 8.02 %

RN 91.98 %

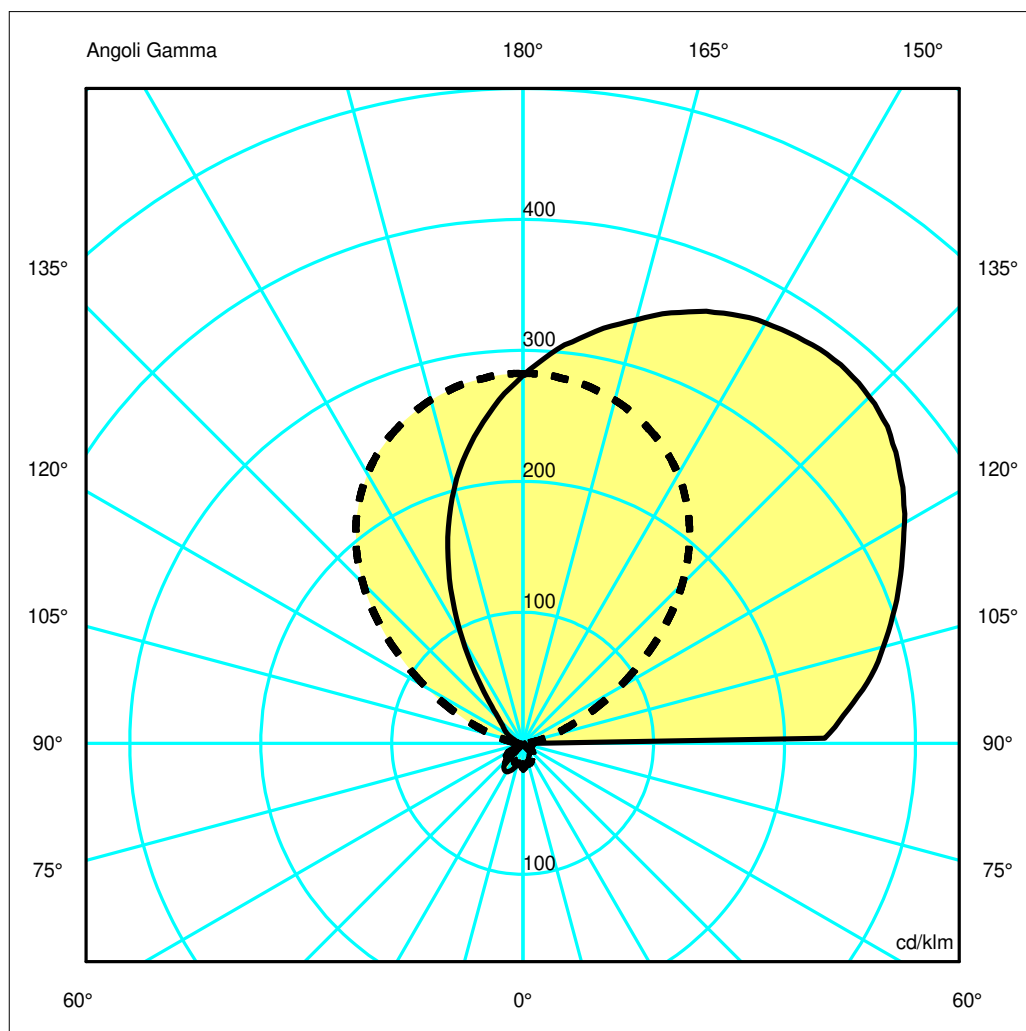

Luminaire

Code 0918W70A
Name Mesmeri LED 2700K - rame

Measur.

Code FTS1700096
Name Mesmeri LED 2700K - rame

Luminaire Flux	2450.00 lm	Luminaire Power	28.00 W	Efficacy	87.50 lm/W	Efficiency	100.00%
Lamps Flux	2450.00 lm	Maximum value	377.62 cd/klm	Position	C=0.00 G=140.00	CG Sym. on planes 0-180	
Rectangular Luminaire Rectangular Luminous Area	Length Length	340 mm 145 mm	Width Width	234 mm 50 mm	Height Height	154 mm 29 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.007250 m2 0.004350 m2 0.001500 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.004350 m2 0.001500 m2 0.005975 m2			
Coordinate system Date Measurement Distance	CG 04-03-2014 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux		Sym. on planes 0-180 180 2450.00 lm			
LED Flux=2634,41lm LED Power=25W Eff=93% EfcLed=105lm/W EfcLum=88lm/W Ra=90 SDCM=2 L70(6K)=36000h							
C.I.E. F UTE	31 55 70 8 100 0.08 H + 0.92 T	D DIN 5040 B NBN		-- BZ 7 / 2 / BZ 8 / 4 / BZ 9			

Apertura troppo larga

Apertura troppo larga

Apertura troppo larga